


G. GIOANOLA



OSCAR II° plus

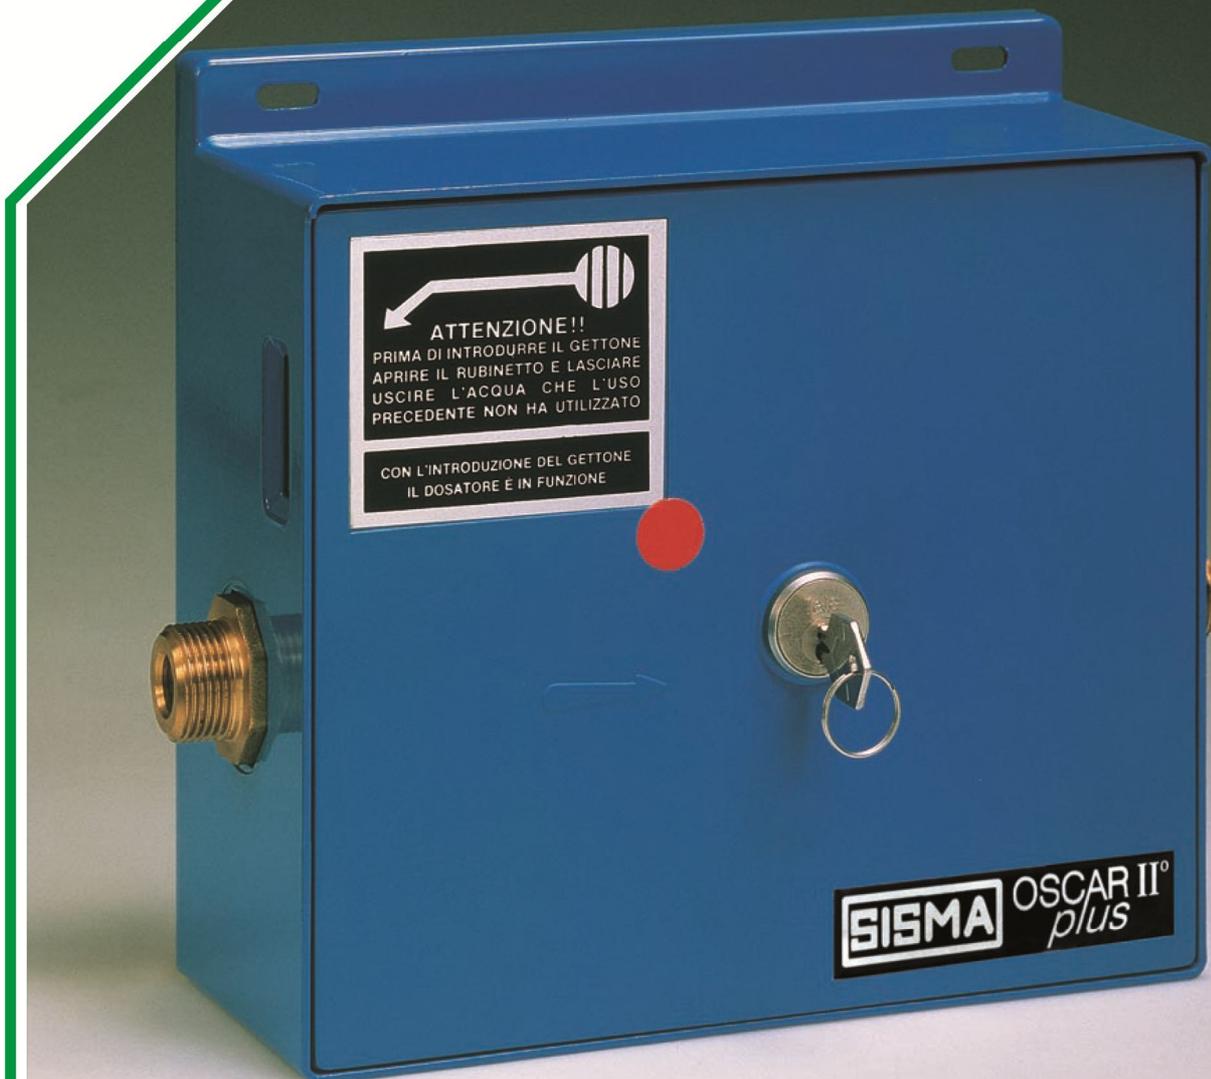


ATTENZIONE!!
PRIMA DI INTRODURRE IL GETTONE
APRIRE IL RUBINETTO E LASCIARE
USCIRE L'ACQUA CHE L'USO
PRECEDENTE NON HA UTILIZZATO

CON L'INTRODUZIONE DEL GETTONE
IL DOSATORE È IN FUNZIONE

SISMA OSCAR II°
plus

- ❖ Coin-operated water meter
- ❖ Mod. OSCAR II° plus with customised token
- ❖ Designed to control and meter, easily and simply, the consumption of hot (upt to 90°C) and cold water
- ❖ Useful at self- service car washes, camp sites, beaches, communal laundries in apartment blocks, and in any other place where, in order to avoid wasting water, it is necessary to control its distribution
- ❖ The internal parts are made entirely of 18/8 STAINLESS STEEL and OT/58 BRASS, so as to guarantee that it works perfectly whatever the quality of the water may be


OSCAR II° plus

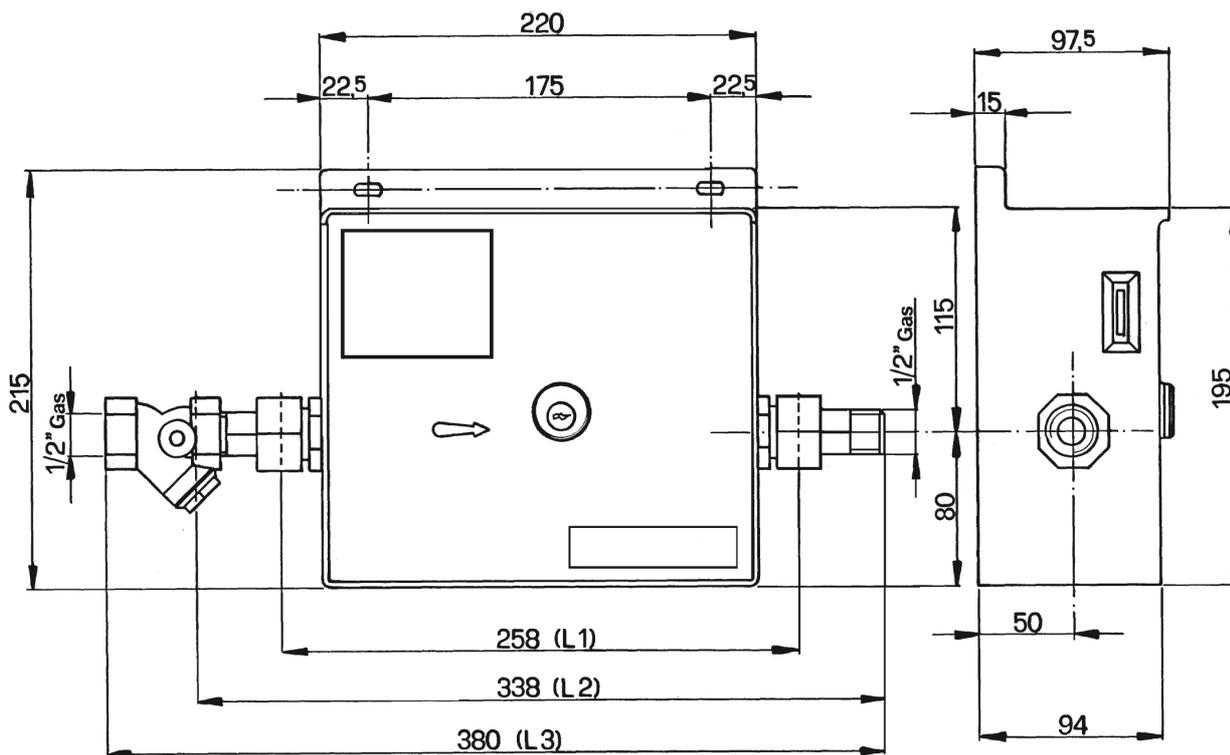

The Company's policy is one of continuous product improvement and the right is reserved to modify the specifications container herein without notice. 02-16

INSTALLATION AND START UP

EXAMPLE SCHEME

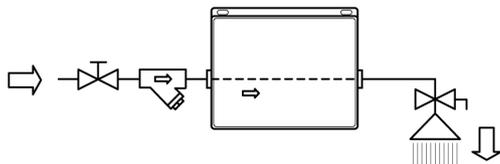

OSCAR II° plus, as opposed to normal water meters, may be wall-mounted, thus it is necessary to carry out the following operations in the set order:

- Fit the impurity collector to the water meter, with its outlet facing down
- Mount the water meter on the wall with the connectors perfectly horizontal
- Using the flexible tube, connect the water meter to the water inlet and outlet pipes.
- During the assembling work, make sure all the parts are perfectly clean
- All the operations must be carried out with the water - meter cover closed.
- It is good practice to place a gate upstream of the impurity collector.

START UP:

- turn on the water tap
- let the water run until the water meter shuts it off
- if no water comes out, insert a token.

OSCAR II° plus COIN-OPERATED WATER METER

The apparatus is used to meter the distribution of hot and cold potable water by inserting a special "OSCAR II° plus" token.

IT WORKS MECHANICALLY, thus avoiding the need for any power points.

The quantity of water distributed, with one token, is constant and cannot be altered except by sending the meter back to the manufacturer, who will see to the resetting of the apparatus.

The purchaser will inform the manufacturer as to the new quantity of water that has to be programmed for one token.

To set the amount of water to be distributed for one token, choose one of the following quantities:

5 - 10 - 12 - 15 - 18 - 20 - 25 - 30 - 40 - 50 - 100
(other values available on request)

The water meter does not require any maintenance or lubrication.

WORKING PRESSURE

- minimum 1 bar
- maximum 10 bar

The OSCAR II° plus water meter is equipped with the following accessories:

- n. 2 pipe fittings (nut, tailpiece, gasket)
- n. 1 bronze impurity collector with stainless-steel filter
- n. 50 OSCAR II° plus tokens



G. GIOANOLA SISMA meters

Str. Alessandria 50 - 14049 NIZZA MONF.TO (AT) ITALY - Tel. +39.0141.793536 - Fax +39.0141.702757 - E-mail: info@gioanola.it - <http://www.gioanola.it>