

G. GIOANOLA




ELECTRONIC COUNTERS



MOD. H7EC-N ELECTRONIC COUNTER

- ❑ Digital pulse counters with voltage free input (opening and closing of a contact) and with contact terminals
- ❑ Model H7EC-N with an 8 DIGIT display (0 ... 99999999) with external and manual reset; alimentation and memory protection by lithium pad battery, 7 years life; weight 60 grams approx.


Ambient operating temperature: -10°C ... $+55^{\circ}\text{C}$ (with no icing); weight 60 grams approx.

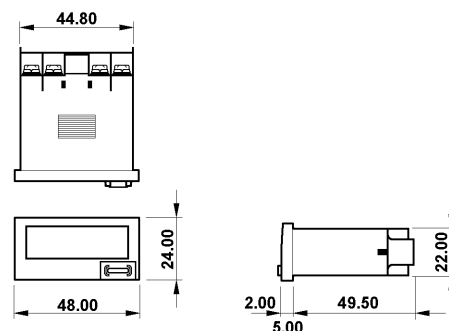

MOD. H7CX-AUD1 ELECTRONIC COUNTER

- ❑ Digital pulse counters with voltage free input (opening and closing of a contact, normally open or normally closed, configurable by wiring during installation) and with contact terminals, linkable to electric valves, alarms, PLC, etc., for the manufacture of dosing, purifying and mixing equipment, etc.
- ❑ Preselection of the values by buttons on panel (and the chance to change setting during the working time), 6 digit backlit LCD (-99999 ... 999999) with external and manual resetting
- ❑ Memory protection by EEPROM, 10 year approx life
- ❑ Power supply: 12 to 24 V DC / 24 V AC 50/60 Hz

Ambient operating temperature: -10°C ... $+55^{\circ}\text{C}$ (with no icing); weight 130 grams approx.

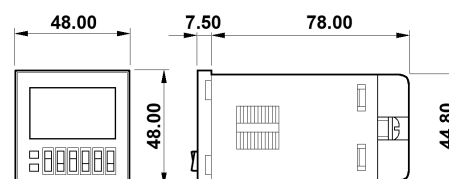

The company's policy is one of continuous product improvement and the right is reserved to modify the specifications contained herein without notice. 02-16



G. GIOANOLA SISMA meters

Str. Alessandria 50 - 14049 NIZZA MONF.TO (AT) ITALY - Tel. +39.0141.793536 - Fax +39.0141.702757 - E-mail: info@gioanola.it - <http://www.gioanola.it>

G. GIOANOLA



CONVERTER FOR M-BUS NETWORK



MOD. ADAPTO CONVERTER FOR M-BUS NETWORK

- Suitable for converting the output signals of two or four reed pulse emitter counters (sanitary cold water - sanitary hot water) into signals for M-bus network wired 300 /2400 / 9600 bps
- Power supply from M-Bus network, when connected, and battery-powered in case of interruption of the mains voltage
- Management primary ID, secondary units, instantaneous reading, device type, etc
- Wall installation (version available for DIN rail)
- Configuration software included on the Windows platform

The company's policy is one of continuous product improvement and the right is reserved to modify the specifications contained herein without notice. 02-16



G. GIOANOLA SISMA meters

Str. Alessandria 50 - 14049 NIZZA MONF.TO (AT) ITALY - Tel. +39.0141.793536 - Fax +39.0141.702757 - E-mail: info@gioanola.it - <http://www.gioanola.it>