

## G. GIOANOLA


## WIRF WOLTMANN tangential helix water meter for unfiltered water suitable for irrigation


- Model WIRF DN 50...300, version with cast iron epoxy powder coated body (internally and externally)
- Especially designed for use with unfiltered irrigation water, even with small suspended sediments, taken directly from reservoirs, canals and rivers
- Magnetically driven register with dry dial
- 360° rotating waterproof dial straight reading on numbered drums
- The passage of water through the free-flowing meter reduces head losses to a minimum; the small straight-bladed, tangential impeller is only partially submerged in the water
- Removable measuring mechanism; metal lockable lid
- Nominal pressure (PN) 10 or 16 bar
- Maximum operating temperature: 30°C Operation guaranteed up to 50°C
- May be installed both in horizontal, vertical and inclined position
- MID Approved according to European Directive 2014/32CE
- All models are certified for use with drinking water according to D.M. 174
- Non-MID approved version available on request
- Pre-setting for remote reading with reed switch K100/100 from DN 50 to 125 and K1000/10.000 from DN 150 to DN 300



| Technical Data  | 50                      | 65                      | 80                      | 100                     | 125                     | 150                       | 200                       |
|---|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|---------------------------|---------------------------|
| Permanent flow rate Q <sub>3</sub> (m <sup>3</sup> /h)    | 40                      | 63                      | 63                      | 100                     | 160                     | 250                       | 400                       |
| Overload flow rate Q4 (m3/h)                              | 50                      | 78.8                    | 78.8                    | 125                     | 200                     | 313                       | 500                       |
| Minimum flow rate Q1 (m3/h)                               | 1                       | 1.58                    | 1.58                    | 3.13                    | 4                       | 6.25                      | 10                        |
| Transitional flow rate Q <sub>2</sub> (m <sup>3</sup> /h) | 1.6                     | 2.52                    | 2.52                    | 5                       | 6.4                     | 10                        | 16                        |
| Dial register from/to (m <sup>3</sup> )                   | 0,002 / 10 <sup>6</sup> | 0,02 /<br>10 <sup>7</sup> | 0,02 /<br>10 <sup>7</sup> |
| L) Length (mm)  | 200                     | 200                     | 225                     | 250                     | 250                     | 300                       | 350                       |
| H) Maximum height to extract<br>measuring insert (mm)     | 250                     | 264                     | 280                     | 292                     | 312                     | 338                       | 378                       |
| Pre-setting reed m <sup>3</sup>                           | 0,1                     | 0,1                     | 0,1                     | 0,1                     | 0,1                     | 1                         | 1                         |
| Weight (kg)   | 11                      | 13                      | 14                      | 16.5                    | 21.5                    | 29                        | 42.5                      |

## **TYPICAL ACCURACY CURVE**

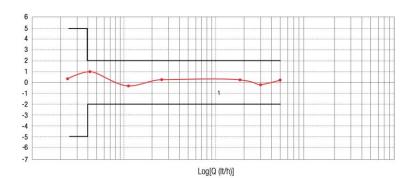



The Company's policy is one of continuous product improvement and the right is reserved to modify the specification contained herein without notice. Illustrations are not binding 06-22

G. GIOANOLA Contatori d'acqua e di calore SISMA - www.gioanola.it Strada Alessandria, 50 - 14049 NIZZA M.TO (AT) - ITALY - Tel +39 0141 793536 - Fax +39 0141 702757 - E-mail info@gioanola.it